

ABLOY® NOVEL


TUBULAR DEADBOLTS



SECURITY FEATURES


- UL listed products
 - UL Burglary
 - UL 20 min fire rating
- Case hardened steel cylinder housing
- Rotating collar
- Optional key lockable thumbturn
- 6 mm steel retaining screws
- High security bolt
 - hardened steel with 2" length
 - 1" (25,4 mm) throw
- Reinforced steel strike box
- Protective bolt shield

STANDARD BOLT

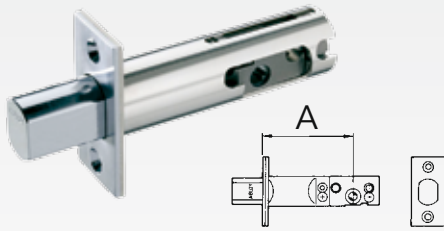

2 3/8 (60 mm) or 2 3/4 (70 mm)
(Adjustable)

DRIVE-IN BOLT

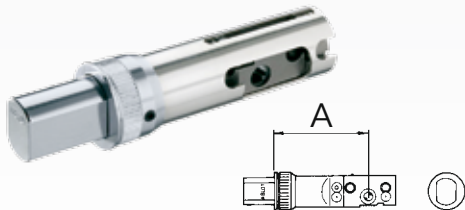

2 3/8 (60 mm) or 2 3/4 (70 mm)
(Adjustable)

Fits 1 3/4" (44,5 mm) to 2 1/8" (54 mm) hole.
Standard hardware for 1 3/4" (44,5 mm) thick door included.

FINISHES AVAILABLE



US26/625
Bright Chrome



US3/605
Bright Brass



US26D/626
Satin Chrome



US4/606
Satin Brass



www.abloy.com

Abloy Oy
Wahlforssinkatu 20
P.O. Box 108
FI-80101 JOENSUU
FINLAND
Tel. +358 20 599 2501
Fax +358 20 599 2209



DOUBLE CYLINDER

CY411U

ME151
c/LC801

ME152
c/LC802



Bolt operated by key outside and inside.

SINGLE CYLINDER WITH THUMBTURN

CY412U

ME153
c/LC801

ME154
c/LC802



Bolt operated by key outside and thumbturn inside.

SINGLE CYLINDER WITH KEY LOCKABLE THUMBTURN

CY413U

ME155
c/LC801

ME156
c/LC802



Bolt operated by key outside and thumbturn inside. Inside thumbturn can be locked with proper key to provide double cylinder security.