

CLIQ® Updater

Secure outdoor update point for CLIQ keys



Robust stainless-steel housing with IK09 and IP65 protection

Intuitive status LEDs, identical to the CLIQ Wall PD

Easy connection with CLIQ Wall PD Gen 2, up to 200 m away

No additional network cable needed

Different installation options (flush-mounted, surface-mounted, panel-integrated)



Compatible with all CLIQ user keys, CLIQ Web Manager and Local Manager



Secure

Security-related elements remain inside the building



Convenient

Simply connect to an existing CLIQ Wall PD via RS485 cable



Durable

Weatherproof IP65 and vandalproof IK09 protection



Versatile


Diverse installation options ensure a wide range of applications

CLIQ Updater


Specification





Technical data and features	
Housing material	Stainless steel
Mounting options	Surface mounting Flush mounting Integrated into intercoms or panels
Dimensions (W x H x D)	Surface-mounted: 156 x 200 x 52 mm Flush-mounted: installation dimension 135 x 181 x 45 mm, front plate 156 x 200 x 7 mm
Key adapter	Product-specific (eCLIQ / PROTEC² CLIQ)
Connection	RS485 cable with a maximum distance of 200 m
Interfaces	All available functions of the connected Wall PD are mirrored. Wall PDs generation 2 with firmware 10.4 or higher are supported
Indicators	Visual and acoustic (all indications are mirrored from the connected Wall PD)
Data storage	No (data is stored in connected Wall PD)
Security	Contact-based data transmission
Encryption	AES / 3DES
Management software	The CLIQ Updater can be used with either CLIQ Web Manager or CLIQ Local Manager Remote. As the Updater takes over the configuration of the connected Wall PD, it is not shown separately in the management software
Power	12 V DC to 24 V DC ± 10 % Current consumption at 12 V DC 0.1 A
Operating temperature range	–25 °C to +60 °C
Relative humidity	< 99 % (non-condensing)
Ingress protection	IP65
Impact protection	IK09
Certification	CE

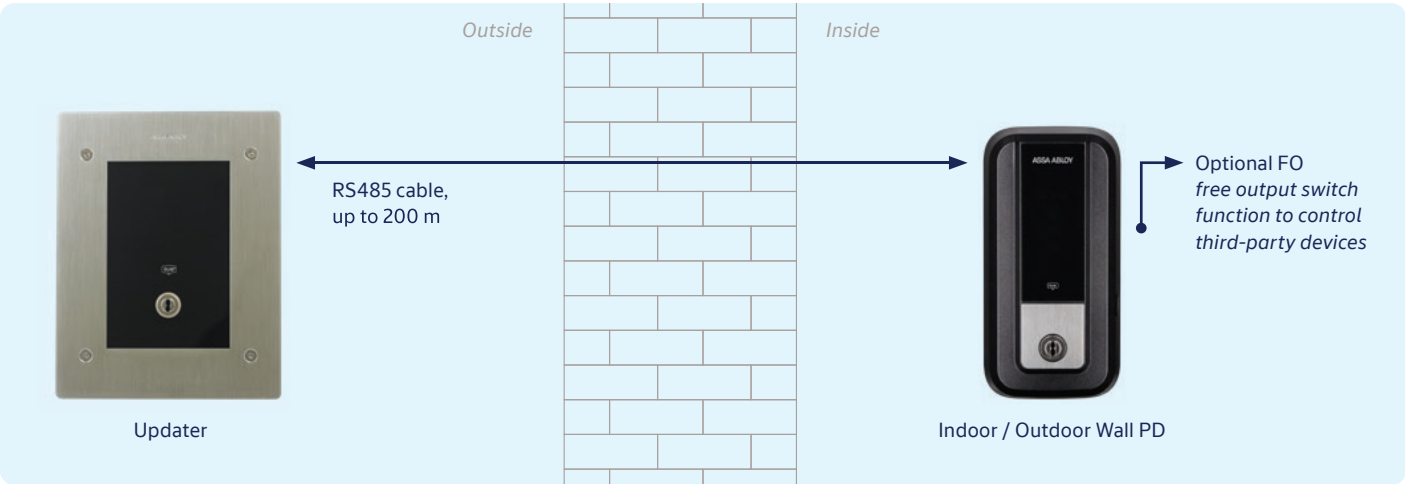


Dimensions in mm

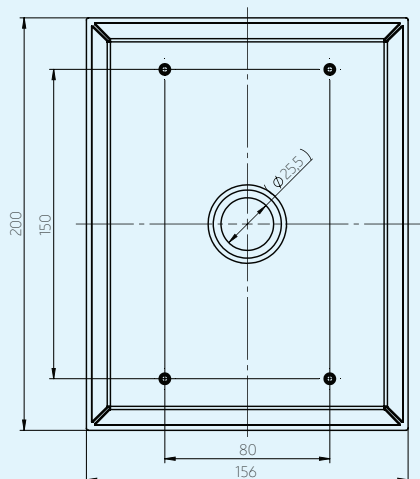



Surface mount

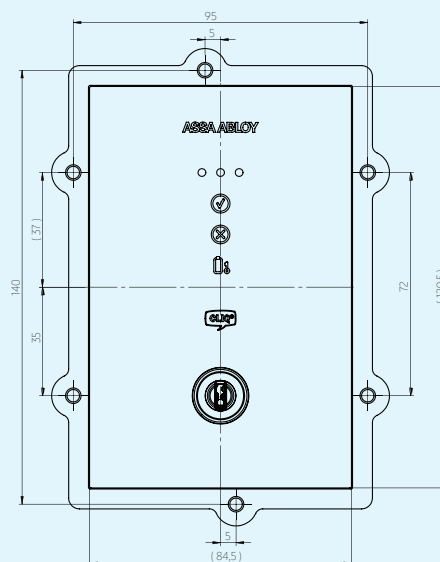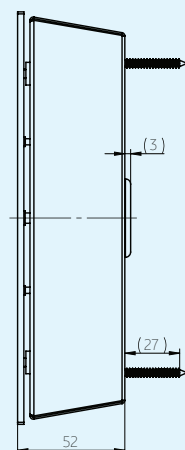

E-module

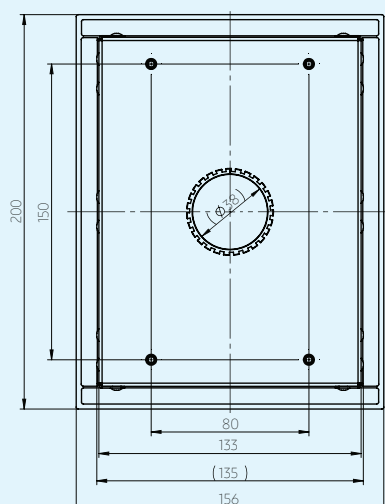

Flush mount

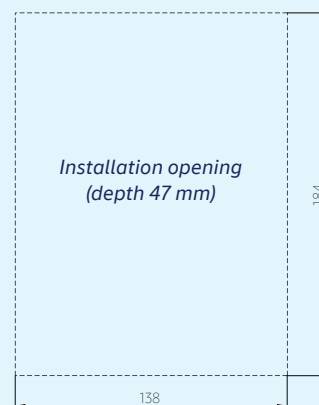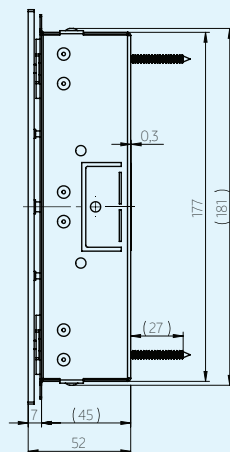

© Images: All rights reserved by ASSA ABLOY.
We reserve the right to make technical modifications.
Version: AA_CLIQ_Updater_Datasheet_2026-01_EMEIA

ABLOY UK
Portobello Works
School Street
Willenhall
WV13 3PW
01902 364500
info@abloy.co.uk
www.abloy.co.uk

ASSA ABLOY