

ABLOY® DOOR PULLS

Architectural
design



ABLOY



IDEAS AND INNOVATIONS

– Finnish design


The design consists of the product's look, feel, comfort of use, and above all, its functionality. It involves understanding of needs, innovation, and the best of traditions. We want to make everyday life smoother and more secure for you.

The ABLOY PULLS bring all kinds of styles to the living environment: modern, traditional, youthful – whatever you desire. The creative solutions in the small details give the final touch to the well-considered whole.


CONTENTS

SURFACE FINISHES	3
ABLOY® PRESTO AND PARLAMENT	4
ABLOY® ERGO AND FORMA	6
ABLOY® INOXI	8
ABLOY® ROD PULLS	10
ABLOY® KNOB PULLS	12
ABLOY® MINI HANDLE	13
TIPS FOR SELECTION AND PLACEMENT OF THE PULLS	14
INSTALLATION OPTIONS	15
ABLOY® QUICK SELECTION TABLE FOR DOOR PULLS	16


Surface finishes



STAINLESS STEEL
(RST)



SATIN CHROME
(HCR)




POLISHED BRASS
(KI)



ABLOY® ACTIVE

POLISHED
+ LACQUER BRASS
(KILA)



CHROME
(CR)



SILVER-ANODISED
(AHO)




ABLOY® ACTIVE

GRAPHITE
(GRA RAL 790-M)



ABLOY® ACTIVE

ALUMINIUM
GREY
(HAR RAL 9006)



ABLOY® ACTIVE

BLACK
(MUS RAL 9005)



ABLOY® ACTIVE

WHITE
(VAL RAL 9010)



ANTIMICROBIAL ABLOY® ACTIVE

Now on all painted door pulls!

ABLOY ACTIVE kills 99% of the most common bacteria in 24 hours and is also effective in combating MRSA. The products in this brochure are available in all RAL colour chart shades to special order.



ABLOY® PRESTO AND PARLAMENT PULLS


are produced from durable brass rod material. The pulls are intended for applications that require resistance to wear, and they are well suited for public buildings and shopping centres.

The variety of installation methods and placement alternatives help to create a new look in the door environment. The collection includes very subdued models that can be used to create a harmonious feel to the site. PRESTO pulls are available in aluminium versions as well.

ABLOY PARLAMENT door pulls are available as standard and custom-made products with the possibility to get the hand and body parts with different diameter thickness. Surface finishing options are available in several types.


ABLOY® PRESTO 137

Brass or aluminium pull

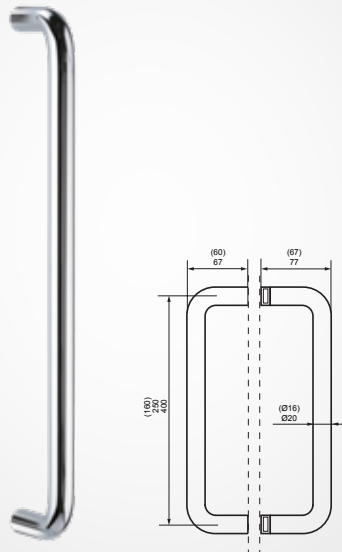


ABLOY® PRESTO 138

Brass or aluminium pull

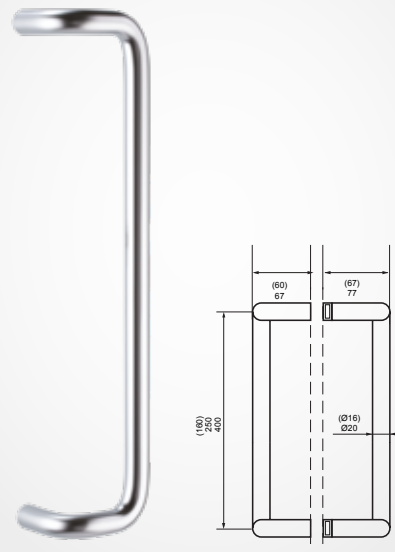

ABLOY® PARLAMENT 210

Brass pull

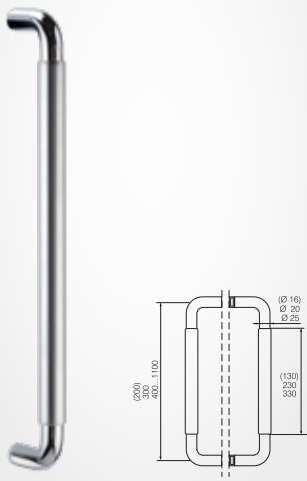


ABLOY® PARLAMENT 216

Brass pull



ABLOY® PARLAMENT 220


Brass pull

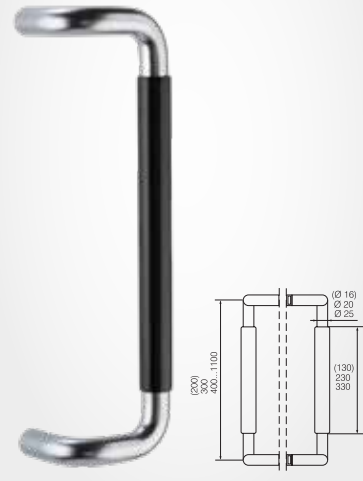

ABLOY® PARLAMENT door pulls are available in heights of 200–1100 mm and in various configurations. These custom-made door pulls can be ordered with separate order forms.


ABLOY® ERGO AND FORMA PULLS

Feature a bolder design that can be used to highlight carefully selected entities and to create stylish solutions. These pulls are made of durable brass. Suitable applications for pulls include office buildings and public properties.

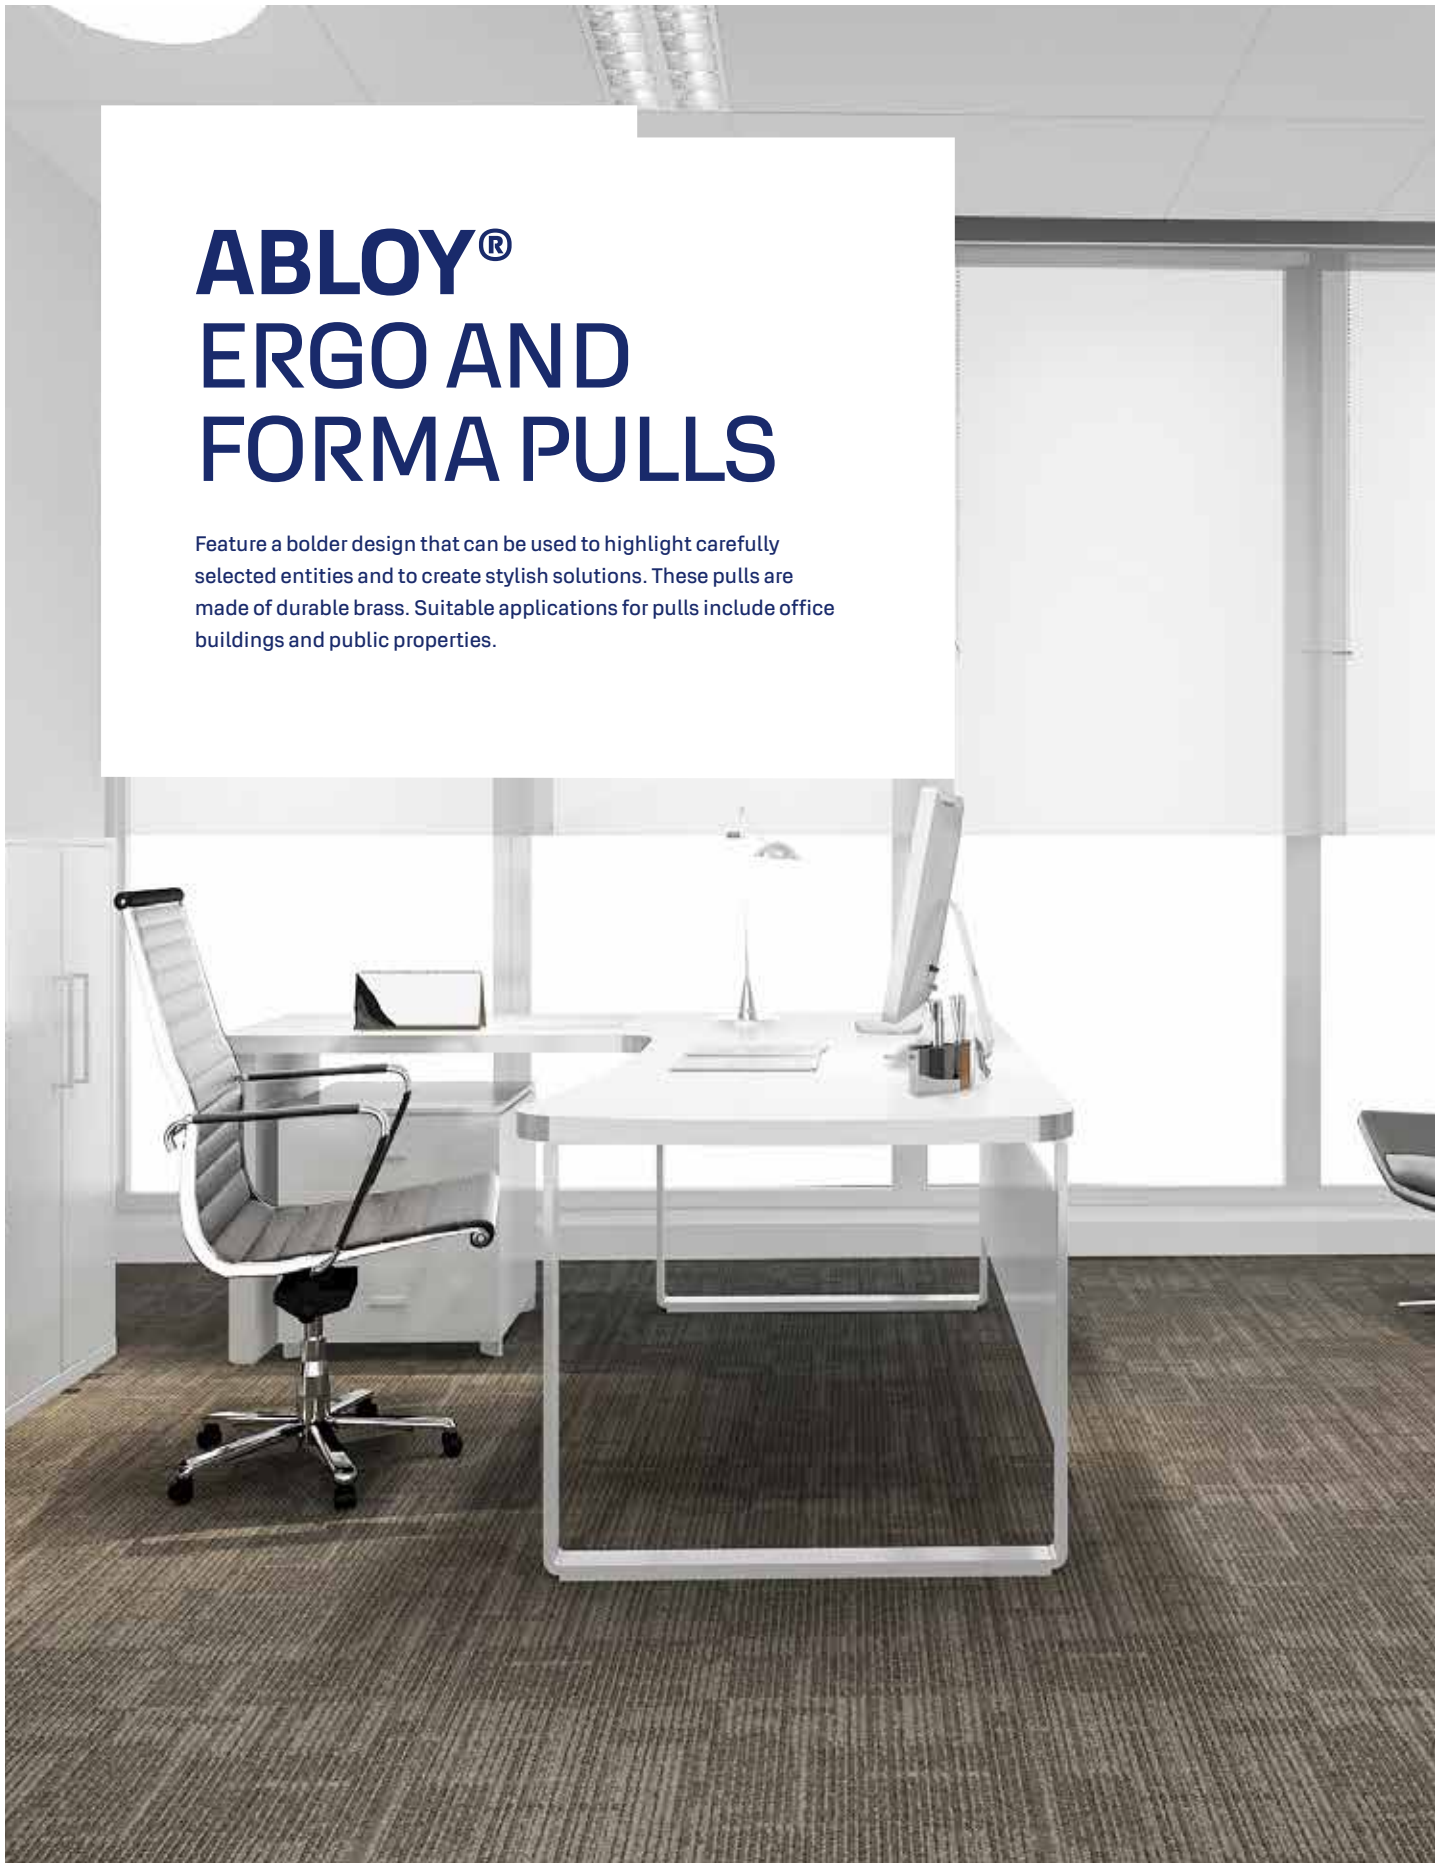




ABLOY® ERGO 326




ABLOY® FORMA 340

Note!

Handing of the pull must be specified when ordered as single pull.

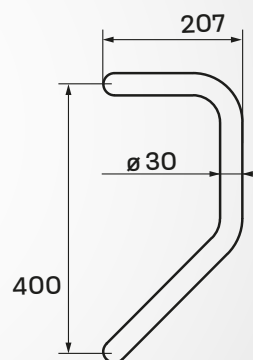

ABLOY® FORMA 343

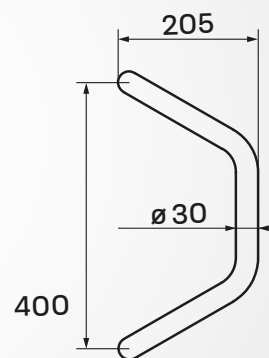


ABLOY® INOXI PULL COLLECTION


Clear-cut products and simplified design create a modern solution in the door environment. INOXI pulls are made of stainless steel. In order to maintain a consistent style, INOXI collection offers handles for both internal and external doors.




**ABLOY®
INOXI 137**




**ABLOY®
INOXI 137S**



**ABLOY®
INOXI 138**




**ABLOY®
INOXI 138S**




**ABLOY®
INOXI DP132**

Stainless steel
Available length: 266 mm




**ABLOY®
INOXI DP133**

Stainless steel
Available length: 266 mm




**ABLOY®
750 CUSTOMIZED PULL**

Can be dimensioned in accordance
with the door, with the maximum
length being 2,600 mm.



ABLOY® ROD PULLS


The most typical applications for rod pulls are metallic gates and warehouse doors equipped with surface locks.

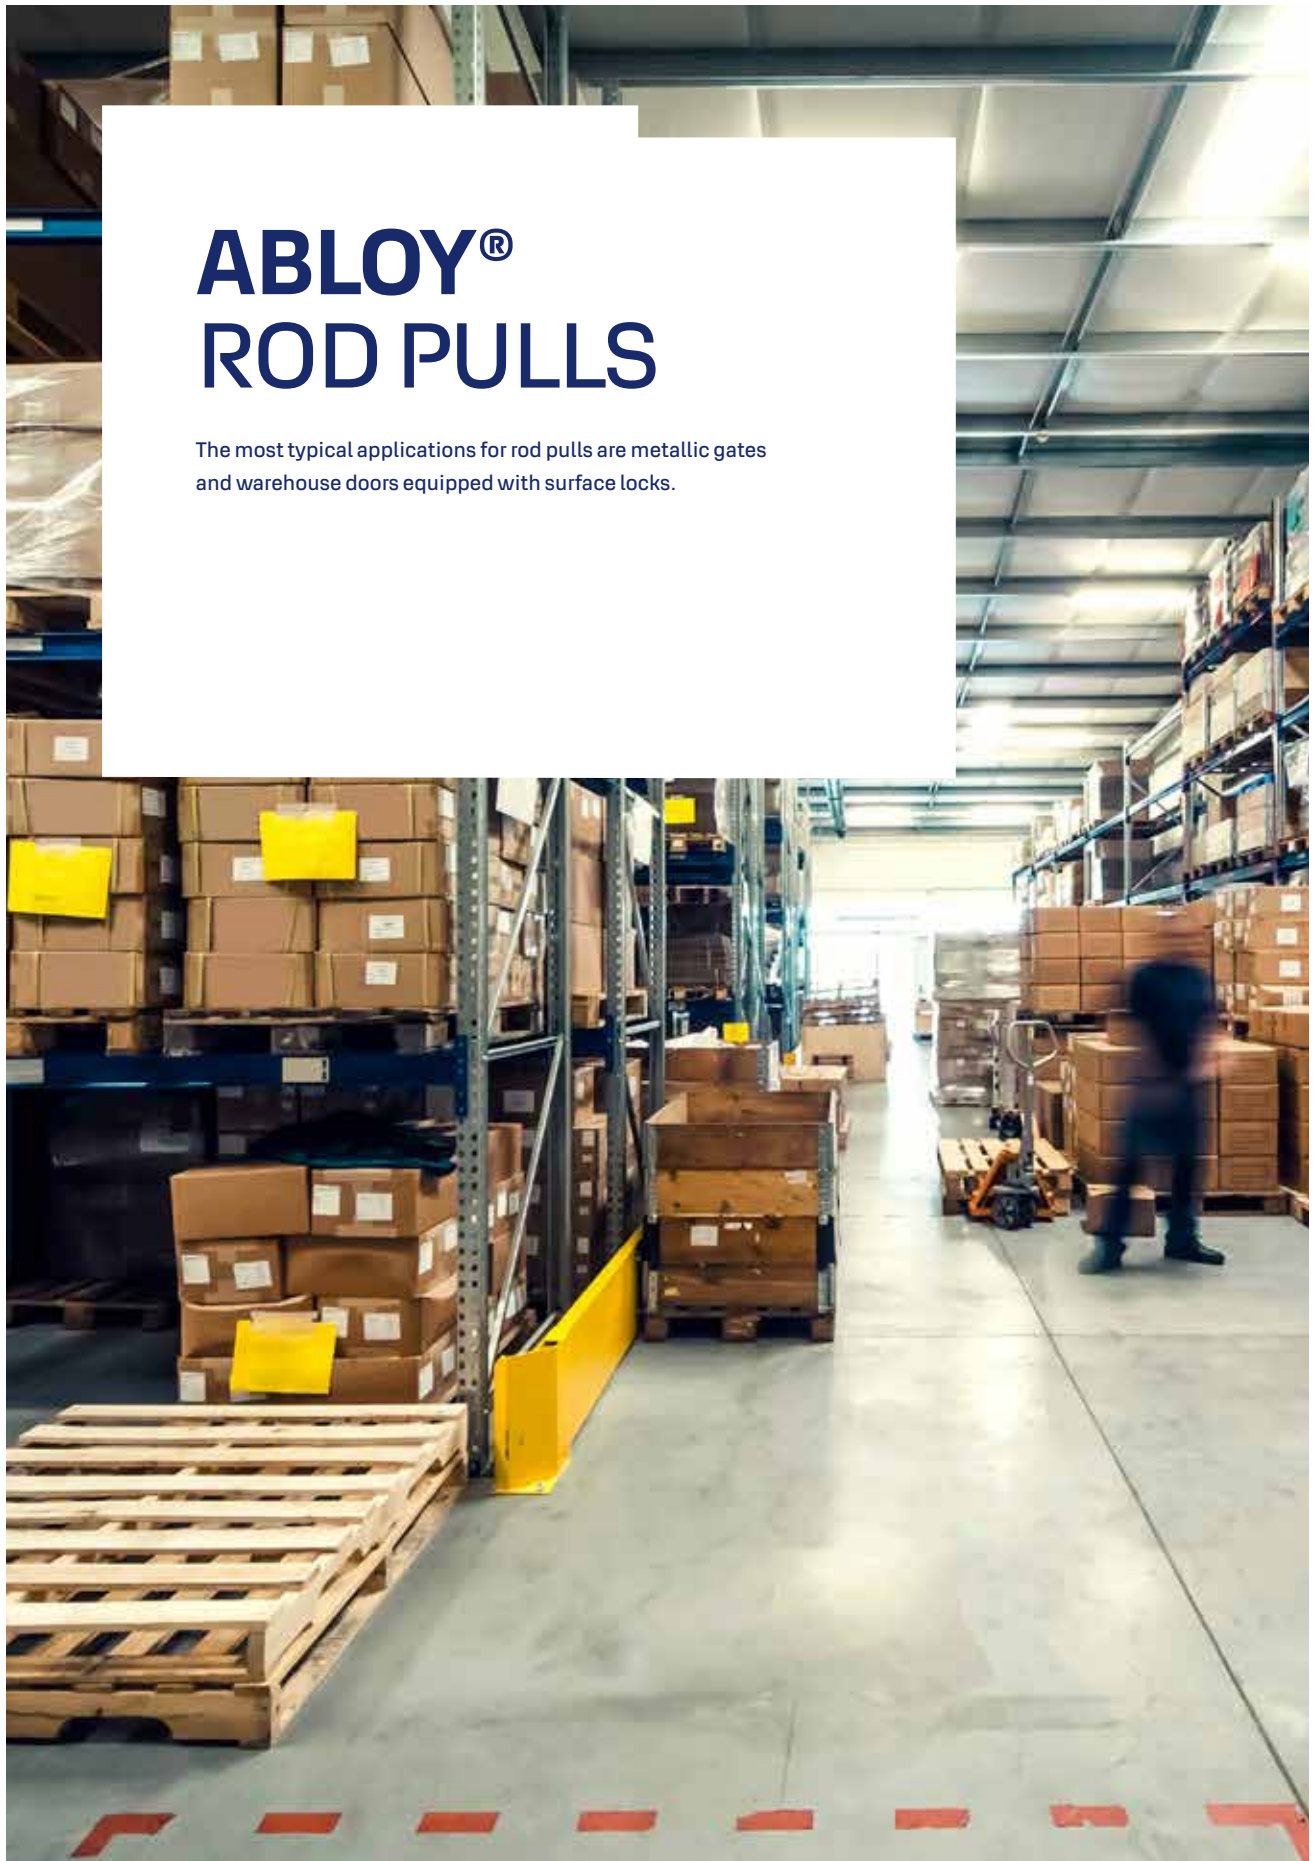

ABLOY® DP136 ELBOW PULL


Aluminium pull

The characteristics of the elbow pull are best emphasised when it is used in hospitals.

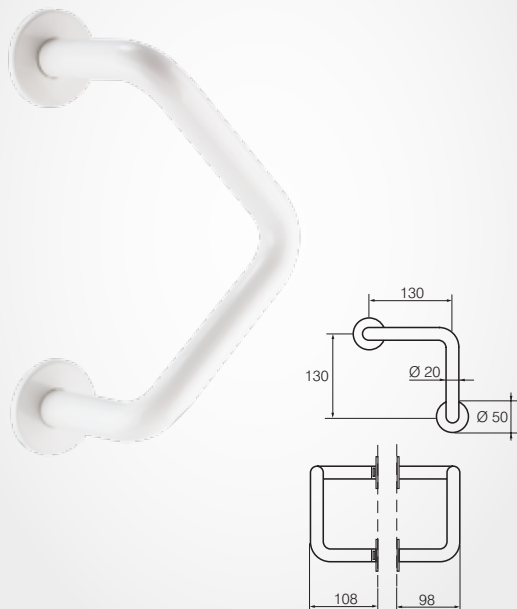

ABLOY® DP139 SUPPORT PULL

Aluminium pull

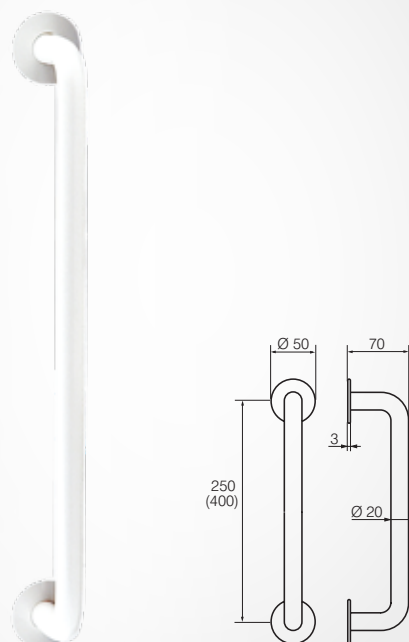

ABLOY® DP130

Brass pull



ABLOY® DP131

Brass pull






ABLOY® **KNOB PULLS**


The knob pulls are well suited to use with regular and sliding doors.
The most common applications include the staircase doors of blocks of flats and the doors of commercial premises.

ABLOY® DP116R


Knob pull

**ABLOY® DP118LK**

Knob pull

**ABLOY® DP117K**



Knob pull



ABLOY®

3-16XS MINI HANDLE


Designed for pull-operated lock cases, this new mini handle stands out from the collection in its size. It offers classic style and provides the designer with freedom of choice for cases in which pulls are used on both sides of the door. The small, subdued handle, adapted from the ABLOY PRESTO collection, is at its best when you want to facilitate the opening of doors. This handle is practical in particular with pull-operated lock cases and access control. The handle material is durable brass, and its design is sufficiently subdued to highlight other elements of architecture. Also available as a profile door handle.



Tips for the selection and placement of door pulls


KEEPING THE HANDS UNHARMED

The pull must be attached far enough from the door frame. This ensures that hands won't get hurt when using the door.

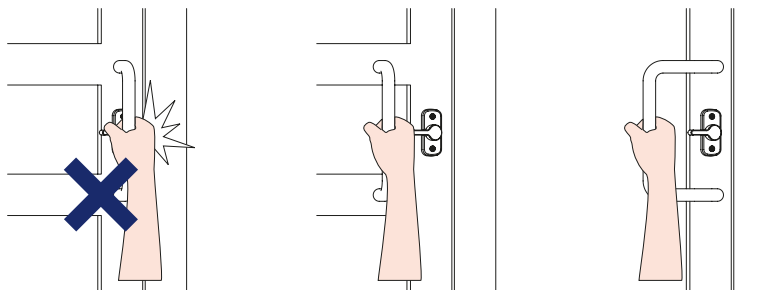


SPECIAL REQUIREMENTS FOR MOTORISED LOCKS

The motorised locks always require a pull height of at least 400 mm. The lock case must be placed between the drillings of the pull without going through the lock. This is to ensure that the lock case does not become damaged during the installation of the pull.



SMOOTH AND EASY KEY USE

The pull must be attached far enough from the cylinder. If sufficient distance cannot be reached with a straight pull, a bent pull should be selected for the site. This enables smooth, hassle-free use of the key cylinder.

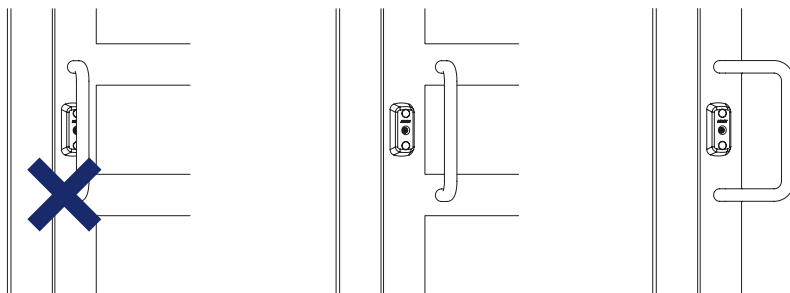

STYLISH PULL INSTALLATION


The attachment parts of a one-sided pull can be hidden with cover plates. The cover plate is always the same shade as the pull. Available for all pull thicknesses.




Installation options

Through fixing of a one-sided pull (K)


Distance of the cover plate from the door surface: 8 mm

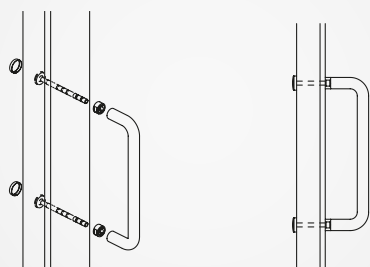


Through fixing of a pull pair (LK)

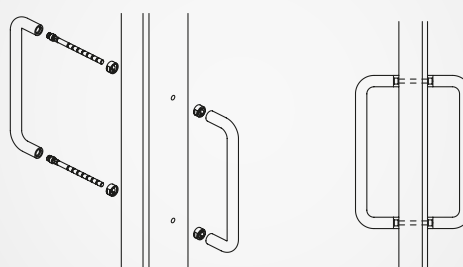

1. Through fixing of one-sided pull with support plate
2. Surface fixing of one-sided pull with support plate

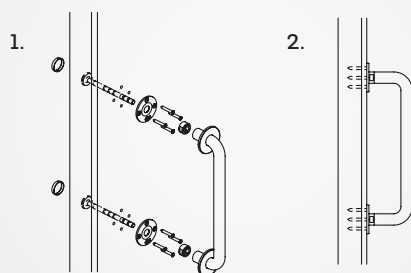


Surface installation of a wire pull with a screw (R)













ABLOY® SUPPORT PLATES DPO39-041

Available with several surface finish options. The surface fitting of the support plate is always the same shade as the pull body when in the same delivery as the pull. An exception to this is the pulls made of stainless steel that have surface fittings with a satin finish. Recommended for use especially with wooden doors.








- For DPO39 20 mm pull body
- For DPO40 25 mm pull body
- For DPO41 30 mm pull body




ABLOY® quick selection table for door pulls


PRODUCT CODE	DOOR PULL	MATERIAL	SURFACE FINISHES									
			RST	HCR	KI	KILA	CR	AHO	GRA	HAR	MUS	VAL
DP137	PRESTO 137		Ms		X	X	X	X				
DP137	PRESTO 137		Al						X	X	X	X
DP138	PRESTO 138		Ms		X	X	X	X				
DP138	PRESTO 138		Al						X	X	X	X
DP210	PARLAMENT 210		Ms		X	X	X	X		X	X	X
DP216	PARLAMENT 216		Ms		X	X	X	X		X	X	X
DP220	PARLAMENT 220		Ms		X	X	X	X		X	X	X
DP326	ERGO 326		Ms		X	X	X	X		X	X	X
DP340	FORMA 340		Ms		X	X	X	X		X	X	X
DP343	FORMA 343		Ms		X	X	X	X		X	X	X

PRODUCT CODE	DOOR PULL	MATERIAL	SURFACE FINISHES									
			RST	HCR	KI	KILA	CR	AHO	GRA	HAR	MUS	VAL
DP337	INOXI 137	Rst	X									
DP357	INOXI 137S	Rst	X									
DP338	INOXI 138	Rst	X									
DP358	INOXI 138S	Rst	X									
DP750	INOXI 750	Rst	X									
DP132	INOXI 132	Rst	X									
DP133	INOXI 133	Rst	X									

PRODUCT CODE	DOOR PULL	MATERIAL	SURFACE FINISHES									
			ABLOY® ACTIVE						ABLOY® ACTIVE	ABLOY® ACTIVE	ABLOY® ACTIVE	ABLOY® ACTIVE
			RST	HCR	KI	KILA	CR	AHO	GRA	HAR	MUS	VAL
DP130	DP130 	Ms		X	X		X		X	X	X	X
DP131	DP131 	Ms		X	X		X		X	X	X	X
DP136	ELBOW PULL DP136 	Al					X	X	X	X	X	X
DP139	SUPPORT PULL DP139 	Al						X	X	X	X	X
DP116	KNOB PULL DP116R 	Ms		X	X	X	X		X	X	X	X
DP117	KNOB PULL DP117K 	Ms		X	X	X	X		X	X	X	X
DP118	KNOB PULL DP118LK 	Ms		X	X	X	X		X	X	X	X

PRODUCT CODE	HANDLE	MATERIAL	SURFACE FINISHES									
			ABLOY® ACTIVE						ABLOY® ACTIVE	ABLOY® ACTIVE	ABLOY® ACTIVE	ABLOY® ACTIVE
			RST	HCR	KI	KILA	CR	AHO	GRA	HAR	MUS	VAL
DH053	PRESTO 3-16 XS 	Ms		X	X		X		X	X	X	X



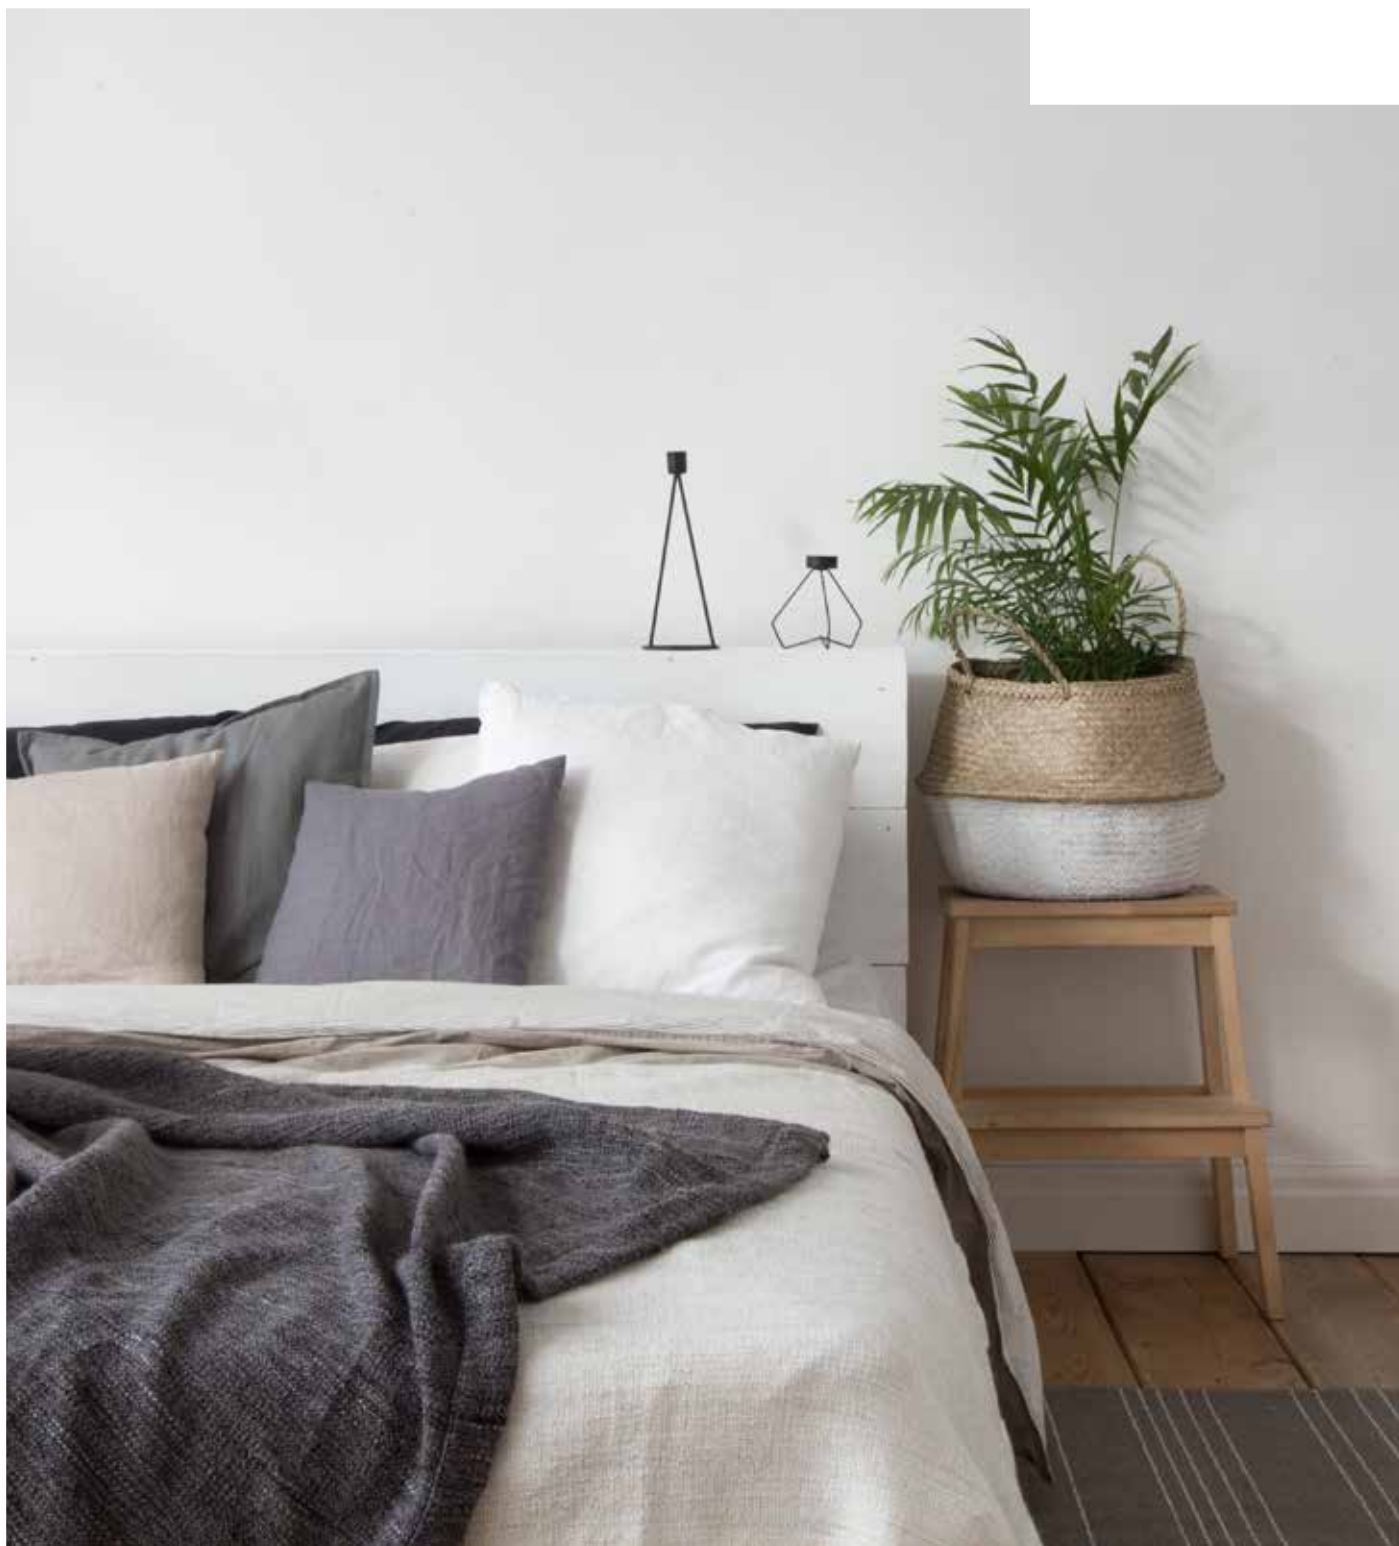

800311 | 11/2020

ABLOY offers security and locking innovations dedicated to creating more trust in the world. Combining digital and mechanical expertise, Abloy Oy develops industry-leading security solutions that protect people, property and business. Abloy is part of the ASSA ABLOY Group, the global leader in access solutions. Every day, we help billions of people experience a more open world.

Abloy Oy
Wahlforssinkatu 20
P.O.Box 108
FI-80101 Joensuu | Finland
Tel. + 358 20 599 2501
Abloy.com

This content is protected by Intellectual Property Rights Laws. The title to the content shall not pass to you, and instead shall remain with Abloy Oy or a third party holding the title. Abloy develops continuously the products and solutions offered. Therefore, the information contained in the document is subject to change without notice. ABLOY PROVIDES THIS CONTENT ON AN "AS IS" BASIS WITHOUT ANY WARRANTIES OF ANY KIND EXPRESS, IMPLIED, OR STATUTORY."

