

ABLOY



ABLOY® PADLOCKS

SECURITY IS THE KEY TO SUCCESS

Everyone needs to be secure.
Governments, companies,
organizations and private individuals.

Criminal acts, violence and breakdowns in information transfer, production and distribution occur increasingly often in everyday life – good reason to ensure that there are no gaps in your security. Everyone can then concentrate on what is most important to them. Without having to worry.



**“Padlocks supplied
have exceeded our
expectations**

due to its hardness, durability and its capability of locking planning into a system. They accommodate perfectly to our climate conditions in the Canary Island, i.e. sea salt, humidity and high temperatures.”

– ENDESA High Power Network

**“Reliable, durable,
and high security**

due to the unique disc cylinder, ABLOY padlocks have met our needs and performed well in a range of weather extremes from coast to coast.”

– Chris Cooper, TELUS Chief Security Office.





The operational reliability of Abloy's unique detainer disc mechanism has been tested both in the laboratory and in demanding locations all over the world.



THE SAME KEY OPERATES ALL LOCKS

Thanks to the patented detainer disc mechanism, different sizes of ABLOY padlocks can – if required – be operated with a single key.

This enables complete solutions. The key operating padlocks can also be used to secure doors, items of furniture and cabinets. Significant reductions can be achieved in both the number of keys required and associated costs.

The ABLOY key system can offer up to 1.97 billion key differs. This means that everyone living in Europe and the Americas could be allocated a unique ABLOY key with individual access rights.

EXTRA BENEFITS FROM THE DETAINER DISC SYSTEM

In the PROTEC² CLIQ system administration, key programming and changes to access rights can be carried out at any location anywhere in the world. Need for mechanical re-keying is minimized, as lost keys can be deactivated or reactivated when found.





HIGH WEATHER RESISTANCE

The SUPER WEATHER PROOF (SWP) padlock range is an excellent example of the proactive way in which Abloy Oy and its customers interact.

Developed in response to customer feedback, the SWP range is designed for use where padlocks must resist extreme cold and excessive amounts of dirt, locations in which traditional solutions fall short. SWP padlocks feature an extremely tight, no compromise construction.

SWP padlocks can also be components in an PROTEC² CLIQ system. This solution is ideally suited to large-scale applications requiring both access management and flexibility in handling access rights.

SWP

SWP CLIQ




PL362

Abloy's strongest padlock

For applications where maximum security is required. Case hardened steel body with raised shoulders and a toploaded cylinder. Typical applications include containers, railway wagons, trucks, heavy sliding doors and military uses.

PL362 padlock is equipped with a 15 mm diameter, case hardened boron steel shackle.

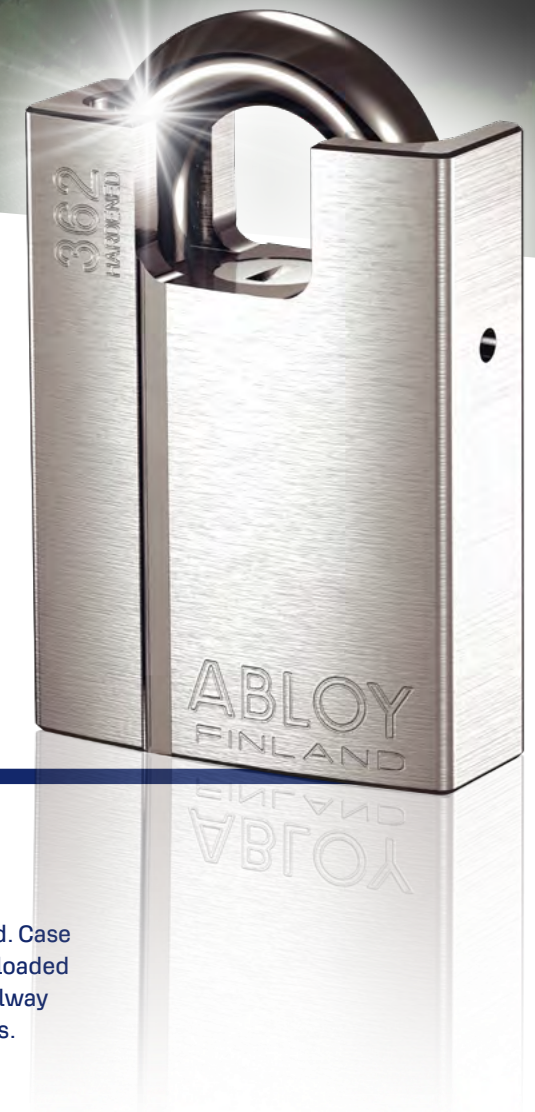

ABLOY Grade 6 padlocks meet the requirements of the following standards: EN12320 Grade 6, SSFN014 Grade 5



PL350

Extra strong steel padlock for demanding applications

Case hardened steel body provides tough protection for high security applications including shipping containers, railway wagons, trucks, and warehouses.

PL350 padlocks are equipped with a 14 mm diameter, case hardened boron steel shackle.



ABLOY Grade 5 padlocks meet the requirements of the following standards: EN12320 Grade 5, SSFN014 Grade 4

PL342

Strong, case hardened steel padlock with protected shackle

The extended case hardened steel body surrounding the shackle makes this padlock virtually impregnable against attack by cutting and prying tools. Suitable for heavy sliding doors, railway wagons, trucks and warehouses.

PL342 padlocks are equipped with a 10 mm diameter, case hardened boron steel shackle.



PL340


Tough, surface hardened steel padlock

Extra-strong padlocks for applications where high security is required. Suitable for construction equipment, tractor trailers and remote storage areas, trucks, storage bins, roller shutter doors, motorcycles and warehouses. The case hardened steel body is highly resistant to all types of physical attack.

PL340 padlocks are equipped with a 10 mm diameter, hardened boron steel shackle.



Abloy Grade 4 padlocks meet the requirements of the following standards: EN12320 Grade 4, SSFN014 Grade 3

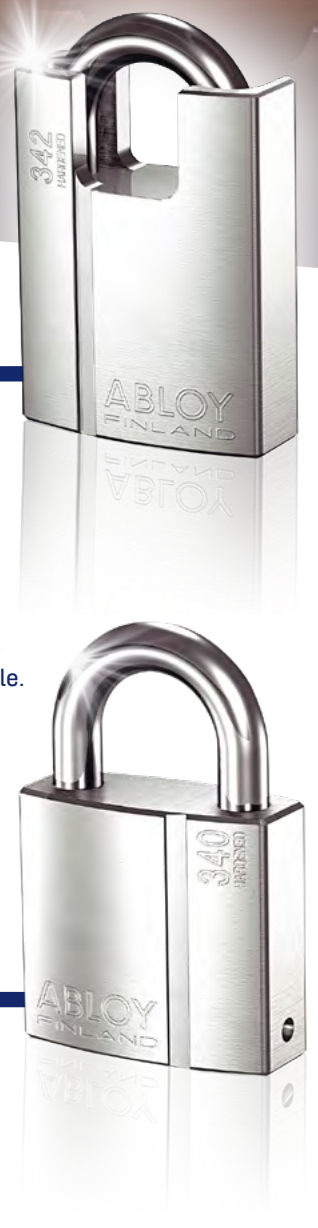



PL341

Tough brass padlock with chrome finish

A strong padlock for the doors, windows and gates of storage facilities, trailers, protective bars, storage lockers, boats, roller-shutter doors and similar applications.

PL341 padlocks feature a 10 mm diameter, case hardened boron steel shackle.



PL330

SWP

Medium strength brass padlock with chrome finish

An all purpose padlock of durable construction for storage doors, motorcycles, gates, trailers, power station switches and similar applications.

PL330 padlocks feature an 8 mm, hardened boron steel shackle. They are also available with non sparking brass or stainless steel shackle. PL330/100 is not tested for a security grading.



ABLOY Grade 3 padlocks meet the requirements of the following standards: EN12320 Grade 3, SSFN014 Grade 2



PL320

Brass padlock with chrome finish for everyday use

A multi purpose padlock ideal for cash boxes, tool boxes, storage cabins, light machinery and lockers.




STAPLE




PL200, PL202

- 12 mm shackle hole
- Grade 3
- PL200 for right-handed doors
- PL202 for left-handed doors
- For frame fixing
- Zinc-plated, polyester-coated case-hardened steel
- Fixing screws included

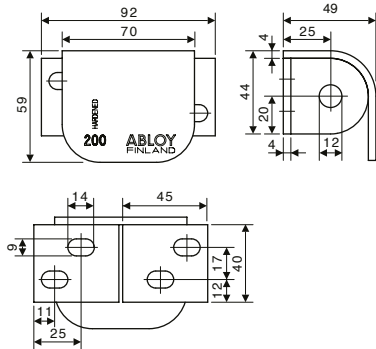


PL201, PL203

- 18 mm shackle hole
- Grade 4
- PL201 for right-handed doors
- PL203 for left-handed doors
- For frame fixing
- Zinc-plated, polyester-coated case-hardened steel
- Fixing screws included

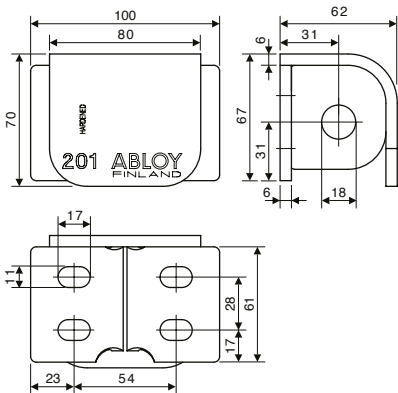


PL204

- 12 mm shackle hole
- Non-handed
- For frame fixing
- Zinc-plated, polyester-coated case-hardened steel
- Fixing screws included

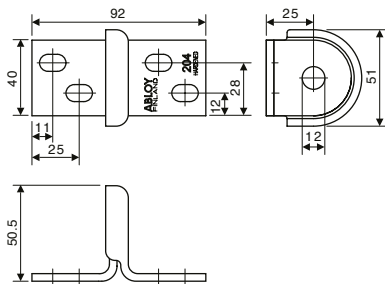

PL205, PL206

- 21 mm shackle hole
- Grade 6
- PL205 for right-handed doors
- PL206 for left-handed doors
- For frame fixing
- Zinc-plated, polyester-coated case-hardened steel
- Fixing screws included

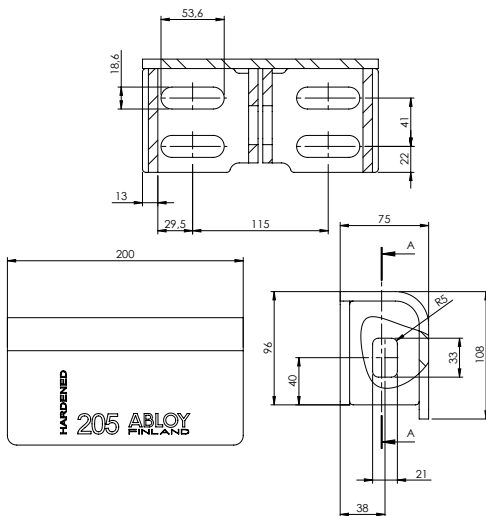


COVERS

- 808248 Dust cover PL330
- 805649 Dust cover PL340, PL341, PL342

- 413391 Body cover (orange) PL330
- 932031 Body cover (orange)n PL340
- 932714 Body cover (orange) PL350

Available with different colors.

- 928615 Shackle cover (black) PL340
- 928616 Shackle cover (black) PL350
- 928673 Body and shackle cover (black) PL340
- 928672 Body and shackle cover (black) PL350

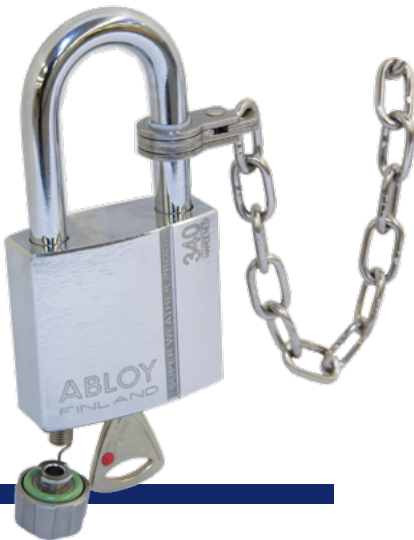

CHAINS

Attachment chain (length 260 mm) makes it easier to ensure that a padlock does not get mislaid while the object that it secures is open. These chains must not be used as part of a security installation.

Available chains:

- 825900 for a 8 mm shackle.
- 825280 for a 10 mm shackle.
- 6000738 for a 14 mm shackle.

PROVEN DURABILITY

ABLOY® padlocks have been designed and manufactured to not only meet the requirements of the EN12320 padlock standard, but exceed as the requirements of our own tests are significantly higher.


Abloy Oy has paid particular attention in design of environmentally friendly production methods.

As a result we use the most modern and environmentally friendly surface plating facility in Finland.




SECURITY GRADES ACCORDING TO THE EN12320 PADLOCK STANDARD							
Requirements	Unit	1	2	3	4	5	6
Minimum number of differs		300	1000	2500	5000	10 000	20 000
Pulling of shackle/staple	kN	3	5	15	30	70	100
Twisting of shackle/staple	Nm	40	100	200	600	1200	2 500
Cutting of shackle/staple	kN	6	15	25	45	70	100
Blow on shackle/staple (weight/g x height/mm) Test temperature	x5 times			1250 x 800 -20°C	3 050 x 1 000 -20°C	6 550 x 1 400 -40°C	7 150 x 1 500 -40°C
Blow on lock body (weight/g x height/mm) Test temperature	x5 times			1250 x 800 -20°C	3 050 x 1 000 -20°C	6 550 x 1 400 -40°C	7 150 x 1 500 -40°C
Load on cylinder plug or locking mechanism	kN			4	5	10	15
Drilling	min				2	4	8
Sawing	min				2	4	8
Torque resistance of cylinder plug	min		2,5	5	15	20	30

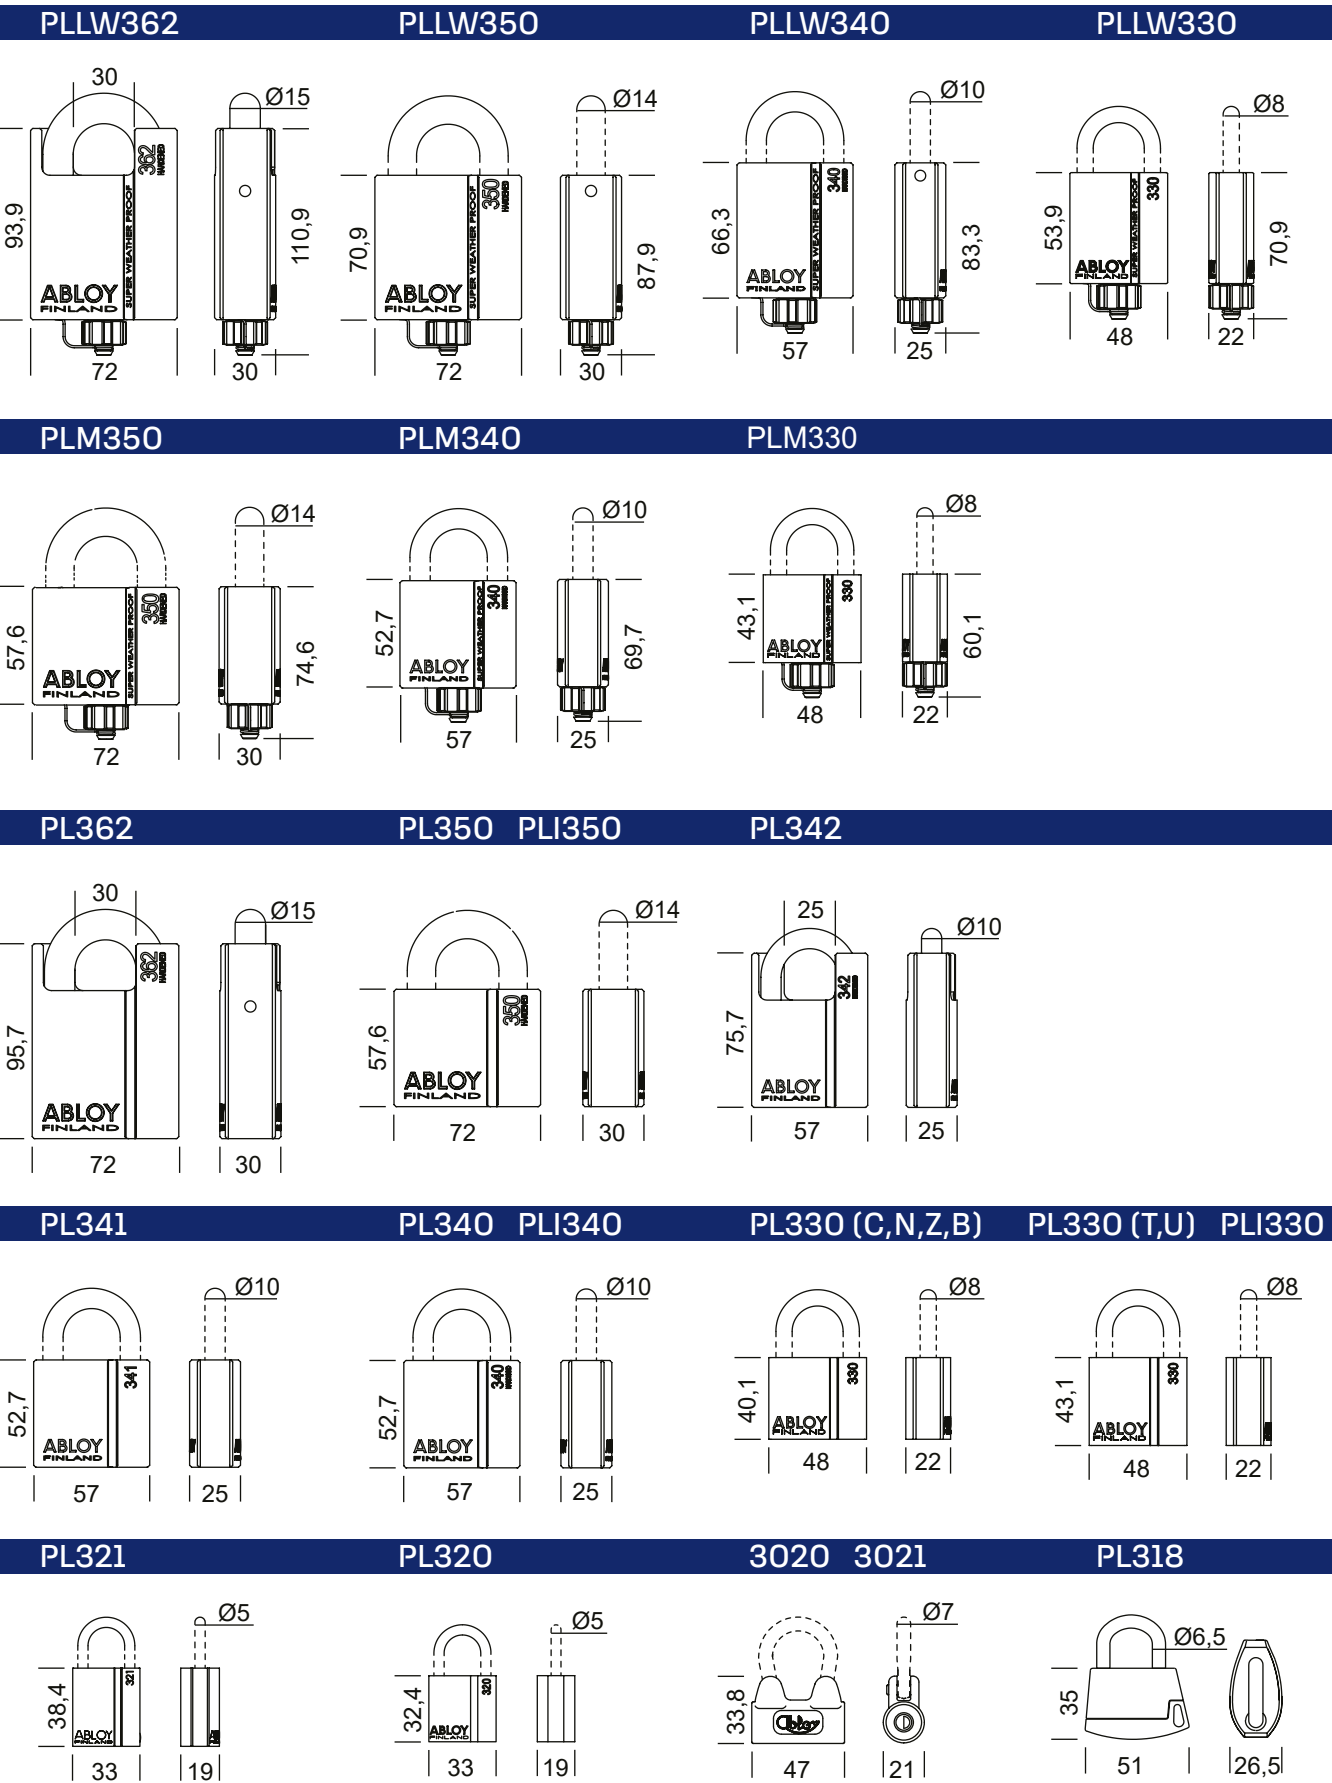

DIMENSION DRAWINGS





MODEL		BODY		SHACKLE					
		MATERIAL	FINISH	MATERIAL	FINISH	HEIGHT	DIAMETER	WIDTH	CYLINDER OPTIONS
Product code	EN					 mm	 mm	 mm	
PL (standard)									
PL318 / 20	*)	Plastic / zinc	-	Steel		20	6,5	21	C
PL3021 / 76	*)	Brass	-	Case-hardened boron steel	Chrome	76	7	33	C
PL3020 / 35	2	Brass	-	Case-hardened boron steel	Chrome	35	7	26	C
PL320 / 20	*)	Brass	Chrome	Stainless steel	-	20	5	18	C
PL320 / 50	*)	Brass	Chrome	Stainless steel	-	50	5	18	C
PL321 / 20	*)	Brass	Chrome	Stainless steel	-	20	5	18	C,J,B,T
PL321 / 50	*)	Brass	Chrome	Stainless steel	-	50	5	18	C,J,B,T
PL330 / 25	3	Brass	Chrome	Case-hardened boron steel	Chrome	25	8	25	C,J,B,T
PL330 / 25	*)	Brass	Chrome	Brass	-	25	8	25	C,J,B,T
PL330 / 25	*)	Brass	Chrome	Stainless steel	-	25	8	25	C,J,B,T
PL330 / 50	3	Brass	Chrome	Case-hardened boron steel	Chromei	50	8	25	C,J,B,T
PL330 / 50	*)	Brass	Chrome	Stainless steel	-	50	8	25	C,J,B,T
PL330 / 100	*)	Brass	Chrome	Case-hardened boron steel	Chromei	100	8	25	C,J,B,T
PL330 / 100	*)	Brass	Chrome	Stainless steel	-	100	8	25	C,J,B,T
PL340 / 25	4	Case-hardened steel	Chrome	Case-hardened boron steel	Chrome	25	10	28	C,J,B,T
PL340 / 50	4	Case-hardened steel	Chrome	Case-hardened boron steel	Chrome	50	10	28	C,J,B,T
PL341 / 25	3	Brass	Chrome	Case-hardened boron steel	Chrome	25	10	28	C,J,B,T
PL341 / 50	3	Brass	Chrome	Case-hardened boron steel	Chrome	50	10	28	C,J,B,T
PL342 / 25	4	Case-hardened steel	Chrome	Case-hardened boron steel	Chrome	25	10	28	C,B,T
PL350 / 25	5	Case-hardened steel	Chrome	Case-hardened boron steel	Chrome	25	14	31	C,J,B,T
PL350 / 50	5	Case-hardened steel	Chrome	Case-hardened boron steel	Chrome	50	14	31	C,J,B,T
PL362 / 25	6	Case-hardened steel	Chrome	Case-hardened boron steel	Chrome	25	15	30	B,T
PLI (shackle sealed)									
PLI330 / 25	3	Brass	Chrome	Case-hardened boron steel	Chrome	25	8	25	J,B,T
PLI330 / 50	3	Brass	Chrome	Case-hardened boron steel	Chrome	50	8	25	J,B,T
PLI340 / 25	4	Case-hardened steel	Chrome	Case-hardened boron steel	Chrome	25	10	28	J,B,T
PLI340 / 50	4	Case-hardened steel	Chrome	Case-hardened boron steel	Chrome	50	10	28	J,B,T
PLI350 / 25	5	Case-hardened steel	Chrome	Case-hardened boron steel	Chrome	25	14	31	J,B,T
PLI350 / 50	5	Case-hardened steel	Chrome	Case-hardened boron steel	Chrome	50	14	31	J,B,T
PLM (shackle sealed and weather seal cap)									
PLM330 / 25	3	Brass	Chrome	Case-hardened boron steel	Chrome	25	8	25	J,B,T
PLM330 / 50	3	Brass	Chrome	Case-hardened boron steel	Chrome	50	8	25	J,B,T
PLM340 / 25	4	Case-hardened steel	Chrome	Case-hardened boron steel	Chrome	25	10	28	J,B,T
PLM340 / 50	4	Case-hardened steel	Chrome	Case-hardened boron steel	Chrome	50	10	28	J,B,T
PLM350 / 25	5	Case-hardened steel	Chrome	Case-hardened boron steel	Chrome	25	14	31	J,B,T
PLM350 / 50	5	Case-hardened steel	Chrome	Case-hardened boron steel	Chrome	50	14	31	J,B,T
PLLW shackle sealed and weather seal cap (IP68 PROTEC² CLIQ)									
PLLW330 / 25	*)	Brass	Chrome	Case-hardened boron steel	Chrome	25	8	25	CLIQ T
PLLW330 / 50	*)	Brass	Chrome	Case-hardened boron steel	Chrome	50	8	25	CLIQ T
PLLW340 / 25	*)	Case-hardened steel	Chrome	Case-hardened boron steel	Chrome	25	10	28	CLIQ T
PLLW340 / 50	*)	Case-hardened steel	Chrome	Case-hardened boron steel	Chrome	50	10	28	CLIQ T
PLLW341 / 25	*)	Brass	Chrome	Case-hardened boron steel	Chrome	25	10	28	CLIQ T
PLLW341 / 50	*)	Brass	Chrome	Case-hardened boron steel	Chrome	50	10	28	CLIQ T
PLLW342 / 25	*)	Case-hardened steel	Chrome	Case-hardened boron steel	Chrome	25	10	28	CLIQ T
PLLW350 / 25	*)	Case-hardened steel	Chrome	Case-hardened boron steel	Chrome	25	14	31	CLIQ T
PLLW350 / 50	*)	Case-hardened steel	Chrome	Case-hardened boron steel	Chrome	50	14	31	CLIQ T
PLLW362 / 25	*)	Case-hardened steel	Chrome	Case-hardened boron steel	Chrome	25	15	30	CLIQ T
Staples									
PL200	3	Case-hardened steel	Powder paint	-	-	-	-	-	
PL201	4	Case-hardened steel	Powder paint	-	-	-	-	-	
PL202	3	Case-hardened steel	Powder paint	-	-	-	-	-	
PL203	4	Case-hardened steel	Powder paint	-	-	-	-	-	
PL204	*)	Case-hardened steel	Powder paint	-	-	-	-	-	
PL205	6	Case-hardened steel	Powder paint	-	-	-	-	-	
PL206	6	Case-hardened steel	Powder paint	-	-	-	-	-	

*) Standard EN12320 not applicable PLI = shackle sealed PLM = shackle sealed and weather seal cap



8801400 4/2025 300 pcs PunaMusta Oy Joensuu

ABLOY offers security and locking innovations designed to create more trust in the world. Combining digital and mechanical expertise, Abloy Oy develops industry-leading security solutions that protect people, property and business. Abloy is part of the ASSA ABLOY Group, the global leader in access solutions. Every day, we help billions of people experience a more open world.

Abloy Oy
Wahlforssinkatu 20
FI-80101
JOENSUU FINLAND
Tel. +358 20 599 2501
Abloy.com

Abloy maintains Product Security Center at www.abloy.com/securitycenter. We recommend that You check the Center on a regular basis in order to be fully informed of product security updates, so that your knowledge of our products remains optimal.

It is the customer's responsibility to define the required level of security, whilst taking into consideration relevant factors for its operations. To achieve the overall level of security required in the customer's operations multiple layers of security must be in place. These include for example locking system, key management system, access management, CCTTV and alarm system as well as physical security in a manner and level specified by the customer.

This content is protected by Intellectual Property Rights Laws. The title to the content shall not pass to you, and instead shall remain with Abloy Oy or a third party holding the title. Abloy develops continuously the products and solutions offered. Therefore, the information contained in the document is subject to change without notice. ABLOY PROVIDES THIS CONTENT ON AN "AS IS" BASIS WITHOUT ANY WARRANTIES OF ANY KIND EXPRESS, IMPLIED, OR STATUTORY."

